




PNEUMATIC COUPLINGS
PNEUMATISCHE KUPPLUNGEN

SERIE 039B

DN19




Materials

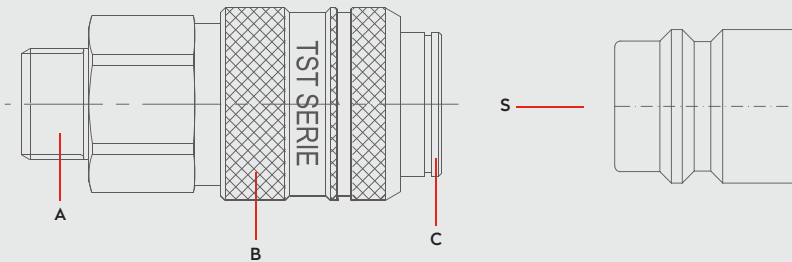


Material Code

- A = Brass
- B = Brass
- C = Brass
- S = Brass




0 - 35 bar
(0-508 PSI)



-20° to + 100°C (NBR)
-4° to + 212°F



Shut Off Type




OM 353 - 02180
OM 400 - 01700
OM 200 - 02500

FLOW 3000 lt/min


DN 19 mm

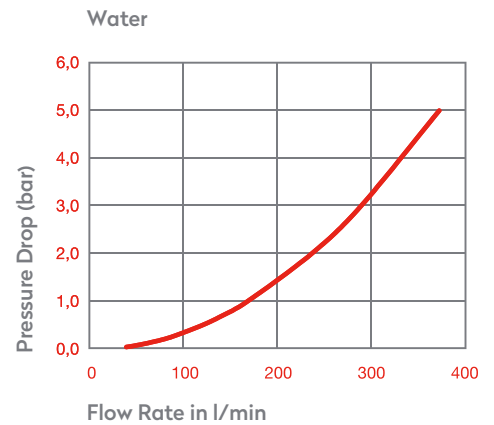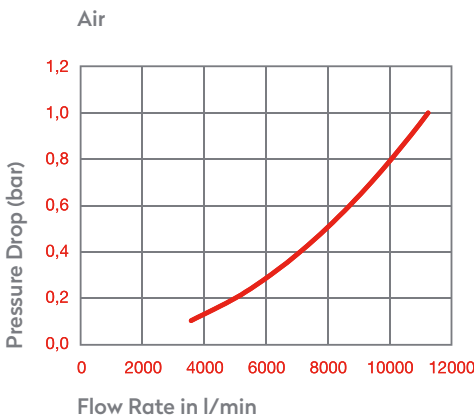

Options

- FPM
- NICKEL
- AISI316
Stainless Steel

Plug Profile Serie 039

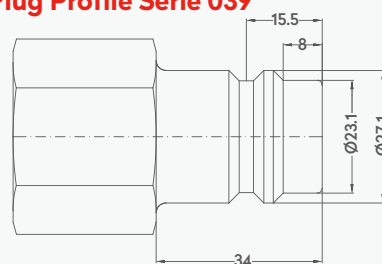


Compatible with


PARKER - RECTUS 39KB




QUICK COUPLINGS SCHNELLKUPPLUNGEN

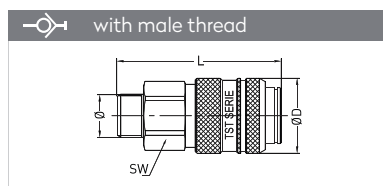

Connection	Part No.	SW	L	ØD
BSP 3/4"	039 EGB 26	41	98,5	45
BSP 1"	039 EGB 33	41	101,5	45
BSP 1 1/4"	039 EGB 42	42	101,5	45

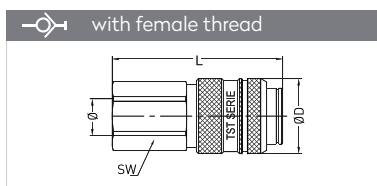


Connection	Part No.	SW	L	ØD
BSP 3/4"	039 DGB 26	41	101,5	45
BSP 1"	039 DGB 33	41	102,5	45
BSP 1 1/4"	039 DGB 42	50	105,5	45

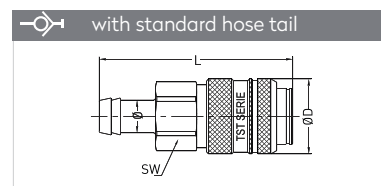


Connection	Part No.	SW	L	ØD
16 mm - 5/8"	039 HGB 16	41	117,5	45
19 mm - 3/4"	039 HGB 19	41	117,5	45
25 mm - 1"	039 HGB 25	41	117,5	45


PLUGS STECKNIPPEL

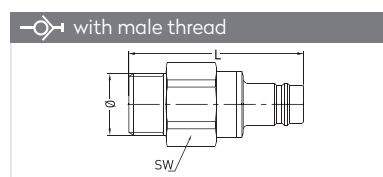

Connection	Part No.	SW	L
BSP 3/4"	039 EUB 26	41	94
BSP 1"	039 EUB 33	41	97
BSP 1 1/4"	039 EUB 42	42	97

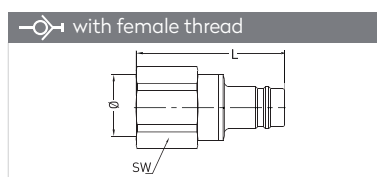

Connection	Part No.	SW	L
BSP 3/4"	039 DUB 26	41	97
BSP 1"	039 DUB 33	41	99
BSP 1 1/4"	039 DUB 42	50	101

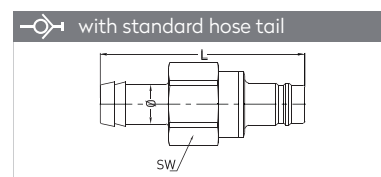

Connection	Part No.	SW	L
16 mm - 5/8"	039 HUB 16	41	113
19 mm - 3/4"	039 HUB 19	41	113
25 mm - 1"	039 HUB 25	41	113