


PNEUMATIC COUPLINGS
PNEUMATISCHE KUPPLUNGEN

SERIE 026B



Materials

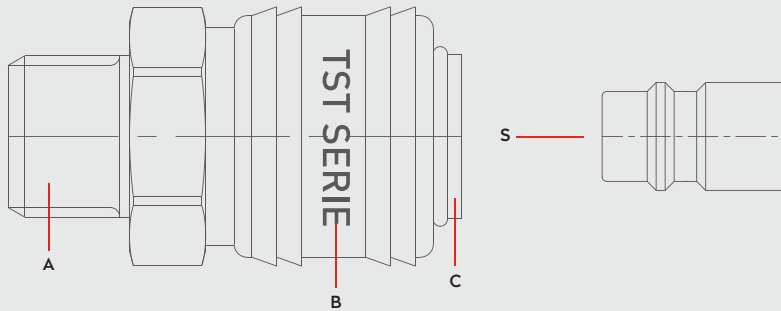


Material Code

A = Brass


B = Brass

C = Brass

S = Brass



0 - 35 bar
(0-508 PSI)



-20° to + 100°C (NBR)
-4° to + 212°F

Shut Off Type






OM 262 - 00990
OM 200 - 00650

FLOW

700 lt/min

DN 7.2 mm

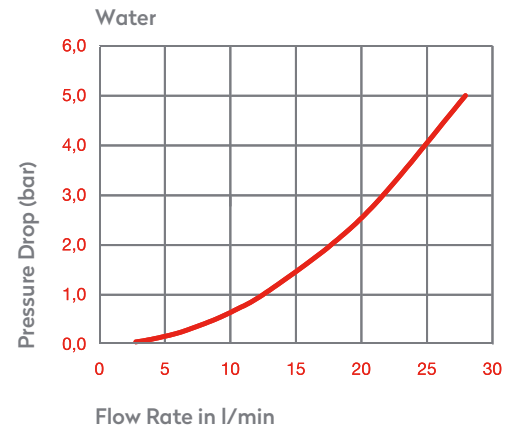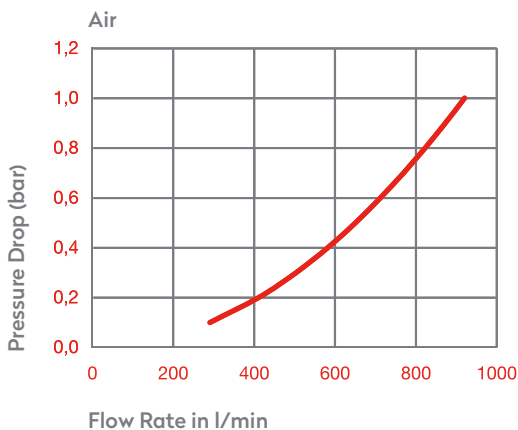


Options

FPM

NICKEL

Plug Profile Serie 026B

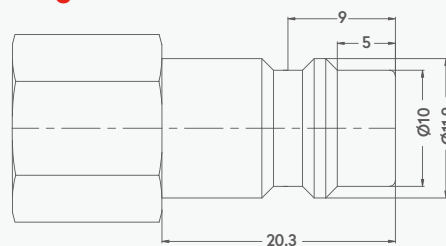

Compatible with


TST 025B
PARKER - RECTUS 25KB, 26KB

PNEUMATIC COUPLINGS
PNEUMATISCHE KUPPLUNGEN


SERIE 026B




QUICK COUPLINGS SCHNELLKUPPLUNGEN

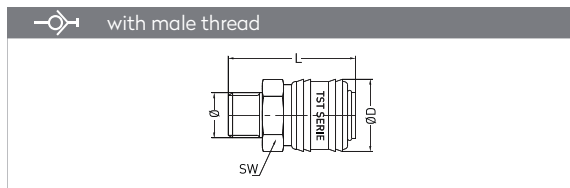


Connection	Part No.	SW	L	ØD
BSP 1/8"	026 EGB 10	21	40.3	24.7
BSP 1/4"	026 EGB 13	21	41.3	24.7
BSP 3/8"	026 EGB 17	21	41.3	24.7
BSP 1/2"	026 EGB 21	21	44.3	24.7
M 14 x 1.5	026 EGBM 14	21	42.3	24.7
M 16 x 1.5	026 EGBM 16	21	42.3	24.7
M 18 x 1.5	026 EGBM 18	21	42.3	24.7

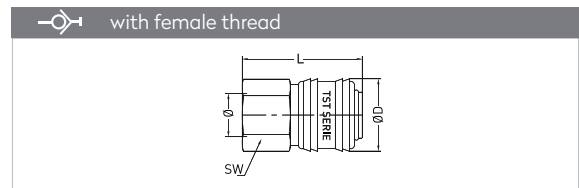


Connection	Part No.	SW	L	ØD
BSP 1/8"	026 DGB 10	21	39.3	24.7
BSP 1/4"	026 DGB 13	21	41.3	24.7
BSP 3/8"	026 DGB 17	21	41.3	24.7
BSP 1/2"	026 DGB 21	24	43.8	24.7
M 14 x 1.5	026 DGBM 14	21	40.3	24.7
M 16 x 1.5	026 DGBM 16	21	40.3	24.7
M 18 x 1.5	026 DGBM 18	21	40.3	24.7

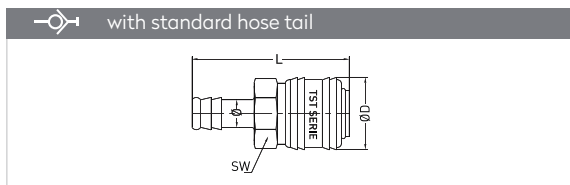


Connection	Part No.	SW	L	ØD
6 mm - 1/4"	026 HGB 06	21	55.3	24.7
8 mm - 5/16"	026 HGB 08	21	55.3	24.7
9 mm - 5/14"	026 HGB 09	21	55.3	24.7
10 mm - 3/8"	026 HGB 10	21	55.3	24.7
13 mm - 1/2"	026 HGB 13	21	55.3	24.7

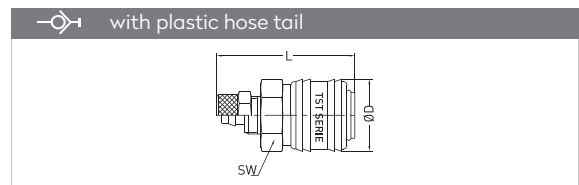

Connection	Part No.	SW	L	ØD
6 x 8 mm - M 12 x 1	026 PGB 06	21	46.3	24.7
8 x 10 mm - M 16 x 1	026 PGB 08	21	49.3	24.7
9 x 12 mm - M 16 x 1	026 PGB 09	21	49.3	24.7

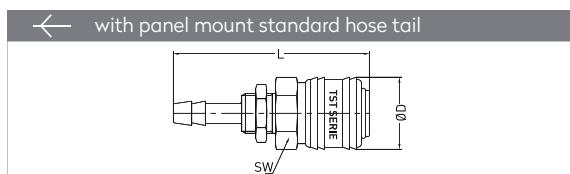

Connection	Part No.	SW	L	ØD
6 mm - M 12 x 1	026 MGB 06	21	63.3	24.7
8 mm - M 12 x 1	026 MGB 08	21	63.3	24.7
10 mm - BSP 1/4"	026 MGB 10	21	63.3	24.7

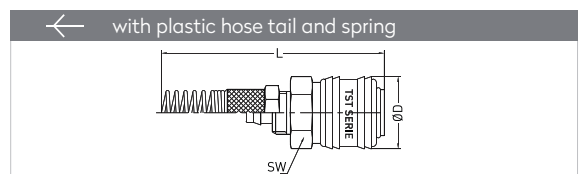

Connection	Part No.	SW	L	ØD
6 x 8 mm - M 12 x 1	026 YGB 06	21	126.8	24.7
8 x 10 mm - M 16 x 1	026 YGB 08	21	143.8	24.7
9 x 12 mm - M 16 x 1	026 YGB 09	21	143.8	24.7